

Dunkin' | 25 Albany Turnpike, Simsbury, CT 06092 | NextGen Branding Package | March 3, 2022



Exclusive Brand Identity Warranty Program

Poyant is the only Approved DBI Brands Vendor to provide an Exclusive 3 Year Comprehensive Labor and Material Warranty on all aspects of the Dunkin' Donuts and Baskin Robbins Brand Package.

Our Warranty to you is supported by the largest installation and service fleet in New England as well as a reliable, qualified national network.

Poyant's Exclusive 3 Year Warranty Program for DBI includes:

Comprehensive Warranty including all labor and material and covers the following:

- Construction and framework of your displays
- Paint finish against peeling and noticeable fading of acrylic polyurethane finishes
- Polycarbonate G.E. Lexan faces are guaranteed against breakage
- All internal lighting components, electrical system, LED's and power supplies
- Steel support structures

Factory Trained Service Technicians anywhere in New England

For shipped sign product warranty covers sign product only

Customer _____

Location _____

Install Date _____

_____ Poyant _____ Date

Excludes "Acts of God", Hurricanes, Unusual Flooding, and Fire.

Poyant
Building Your Brand



25 Albany Turnpike
Simsbury, CT 06092

Project: 20599
Dunkin'

Sales: Bill Gavigan Jr.
Date: 1.19.22
Designer: RMA

Note:
This is an original unpublished drawing created by Poyant Signs, Inc. It is submitted for your personal use in connection with a project being planned for you by Poyant Signs, Inc. It is not to be shown to anyone outside your organization, nor is it to be reproduced, copied or exhibited in any fashion until transferred.

Revisions:
3.2.22 RMA (R2) FT Package



This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and / or other applicable local codes. This includes proper grounding and bonding of the sign.



All Signage Shown is Covered by Poyant's Exclusive DD Franchisee 3 Year Brand Identity Warranty Program

Approved By:

Date:

Sign Location Plan



25 Albany Turnpike
Simsbury, CT 06092

Project: 20599
Dunkin'

Sales: Bill Gavigan Jr.
Date: 1.19.22
Designer: RMA

Note:
This is an original unpublished drawing created by Poyant Signs, Inc. It is submitted for your personal use in connection with a project being planned for you by Poyant Signs, Inc. It is not to be shown to anyone outside your organization, nor is it to be reproduced, copied or exhibited in any fashion until transferred.

Revisions:
2.4.22 RMA (R1) Canopy Location; External Illumination
3.2.22 RMA (R2) FT Package



This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and / or other applicable local codes. This includes proper grounding and bonding of the sign.




All Signage Shown is Covered by Poyant's Exclusive DD Franchisee 3 Year Brand Identity Warranty Program

Approved By:

Date:

Proposed Elevations

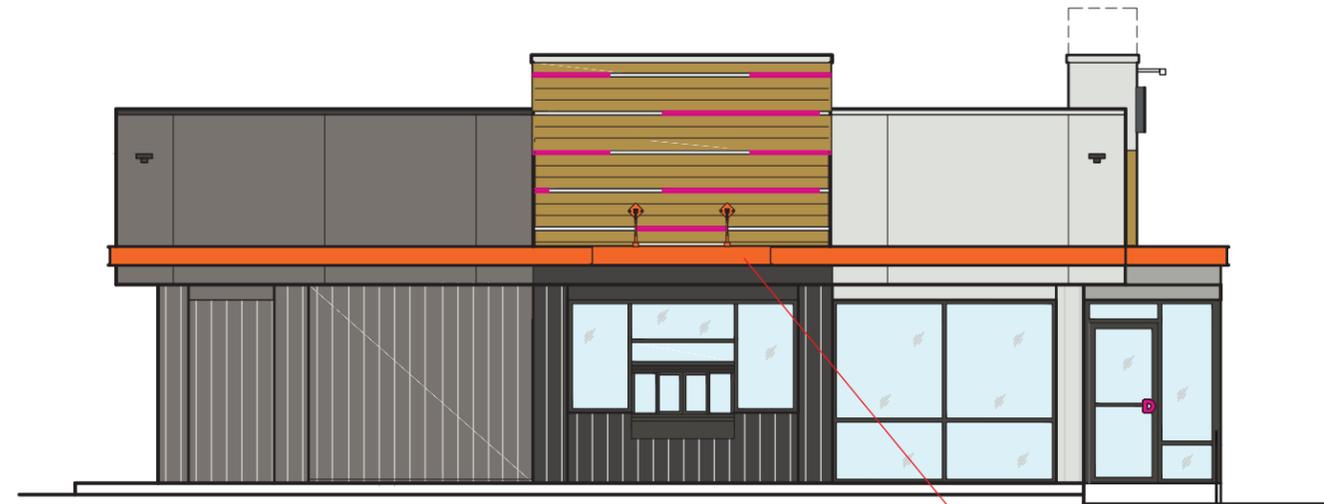

A Proposed Left Elevation
Scale: 1/8"=1'-0"

Proposed Canopy
See Page 5A.1



B Proposed Front Elevation
Scale: 1/8"=1'-0"

Proposed Canopy
See Page 6A.1

Proposed Channel Letters
See Page 1A.1



A Sign Elevation - Front View
Scale: 1/2"=1'-0"

Sign Code: DD-BS-01-Md



B Sign Elevation - Side Views
Scale: 1/2"=1'-0"

Specifications

Qty: 1 22.75 Sq Ft

Externally Illuminated Channel Letters

*External Illumination by Others

- 5" deep remote wired channel letters
- Prefinished dark gray aluminum returns
- 1" Bronze 313 trim cap
- 3/16" White acrylic face with 3M translucent vinyl applied 1st surface
- ® to be 1/2" white PVC with vinyl applied to face; blind stud mounted flush to wall (with 1 stud on back)

*120V

Colors & Materials

Vinyl

- DD Orange 3M 3630-3123
- DD Magenta 3M 3630-1379


Coil Stock

- Dark Gray #119

Trim Cap

- 1" Jewelite Bronze 313

- A** 3/16" White Acrylic with 3M Translucent Vinyl Applied 1st Surface
- B** Threaded Nutsert in Back for Threaded Rod
- E** 3mm ACM Back
- F** Aluminum Returns
- G** 1" Bronze 313 Trim Cap
- H** 1/4-20 Stainless Steel Threaded Rod for Installation; Drill Hole in Wall & Fill with Silicone
- J** Existing Backer Panel by Others

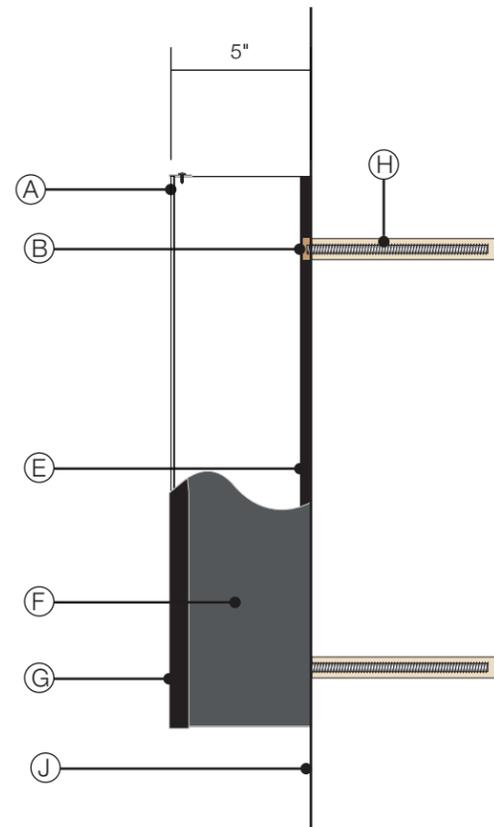

C Construction Detail - Side Section View
Not to Scale



125 Samuel Barnet Boulevard
New Bedford, MA 02745
800.544.0961 | poyantsigns.com



25 Albany Turnpike
Simsbury, CT 06092

Project: 20599
Dunkin'

Sales: Bill Gavigan Jr.
Date: 1.19.22
Designer: RMA

Note:
This is an original unpublished drawing created by Poyant Signs, Inc. It is submitted for your personal use in connection with a project being planned for you by Poyant Signs, Inc. It is not to be shown to anyone outside your organization, nor is it to be reproduced, copied or exhibited in any fashion until transferred.

Revisions:
2.4.22 RMA (R1) External Illumination
3.2.22 RMA (R2) FT Package



This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and / or other applicable local codes. This includes proper grounding and bonding of the sign.




All Signage Shown is Covered by Poyant's Exclusive DD Franchisee 3 Year Brand Identity Warranty Program

Approved By:

Date:

Face Lit Channel Letters

Option A

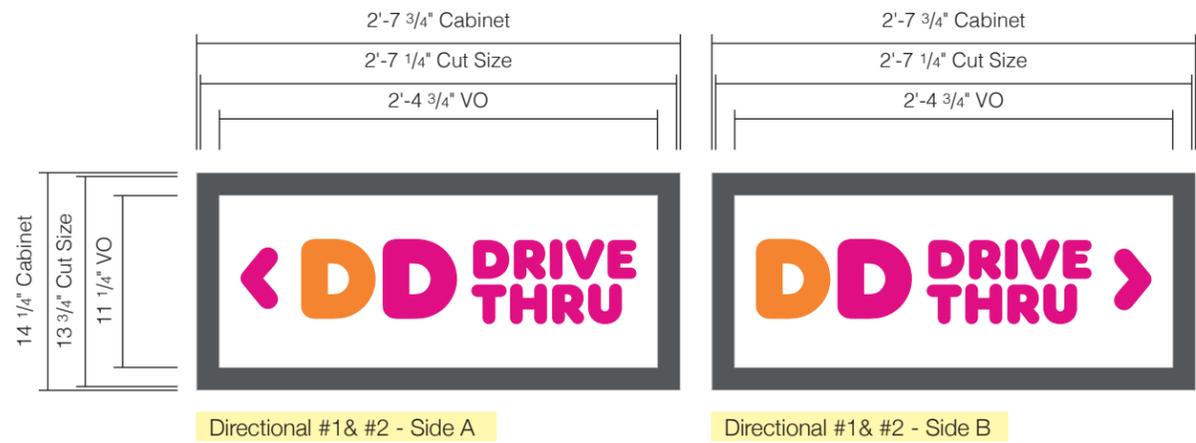

A Sign Elevation - Front View
Scale: 1"=1'-0"

Specifications

Qty = 2

Refurbish Existing Directionals

- *Remove and dispose of existing directional faces
- *Cabinet, retainers and pole to be sanded and painted Westcott Navy in Field
- *Note: Must be 50° or warmer to paint and apply graphics in field

- (Qty: 4) Faces to be 3mm ACM
- Graphics to be reflective digital prints applied first surface
- New faces to be installed into existing cabinet in field

Colors & Materials

Digital Print

	Qty 2	Qty - See Each
		32" x 14 1/2" (with 1/4" bleed)
	Qty 2	Reflective Digital Print with UV Laminate

Paint in Field

Westcott Navy; Satin Finish
Benjamin Moore 1624



125 Samuel Barnet Boulevard
New Bedford, MA 02745
800.544.0961 | poyantsigns.com



25 Albany Turnpike
Simsbury, CT 06092

Project: 20599
Dunkin'

Sales: Bill Gavigan Jr.
Date: 1.19.22
Designer: RMA

Note:
This is an original unpublished drawing created by Poyant Signs, Inc. It is submitted for your personal use in connection with a project being planned for you by Poyant Signs, Inc. It is not to be shown to anyone outside your organization, nor is it to be reproduced, copied or exhibited in any fashion until transferred.

Revisions:
2.4.22 RMA (R1) Non Illuminated



This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and / or other applicable local codes. This includes proper grounding and bonding of the sign.



All Signage Shown is Covered by Poyant's Exclusive DD Franchisee 3 Year Brand Identity Warranty Program

Approved By:

Date:

Refurbish Existing Directionals

Option A



B Photo Comp - Existing (Directional #1)
Not to Scale






C Photo Comp - Proposed (Directional #1)
Not to Scale



D Photo Comp - Existing (Directional #2)
Not to Scale



E Photo Comp - Proposed (Directional #2)
Not to Scale

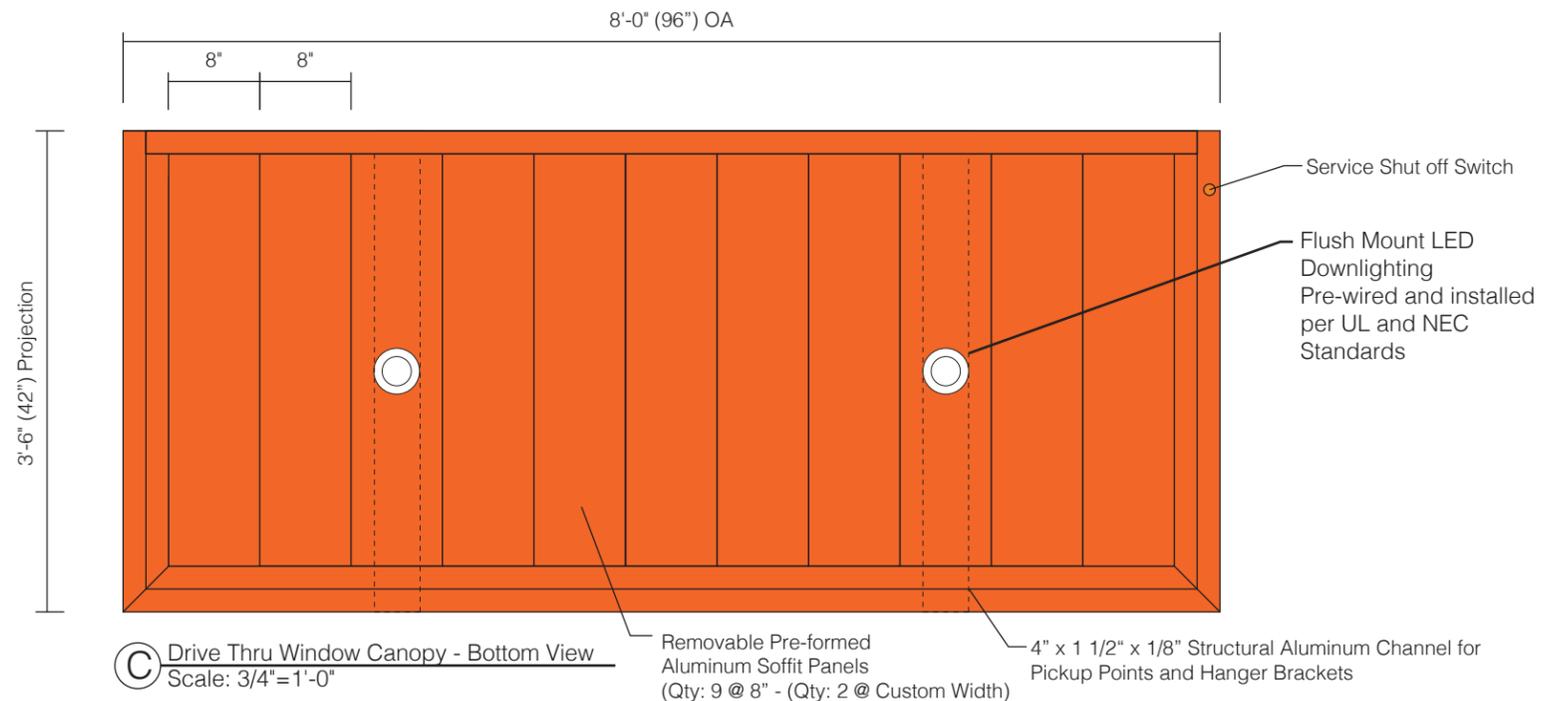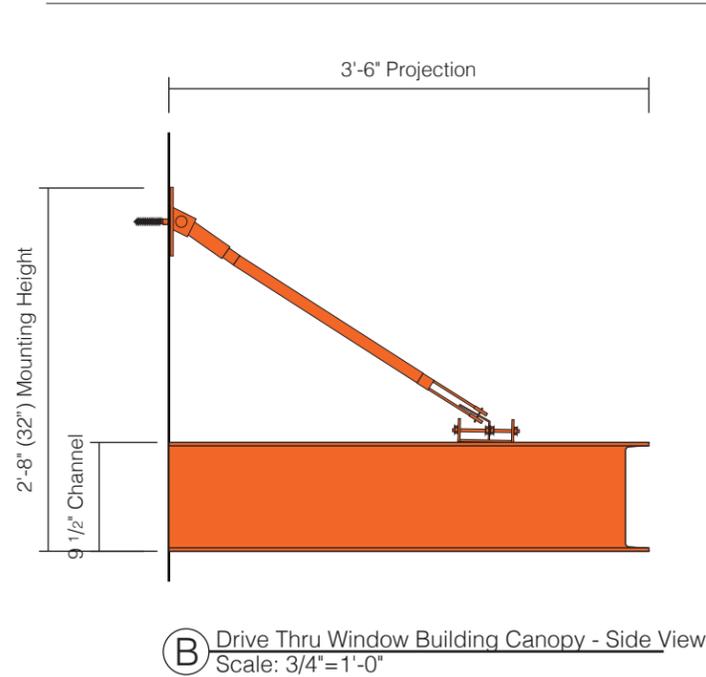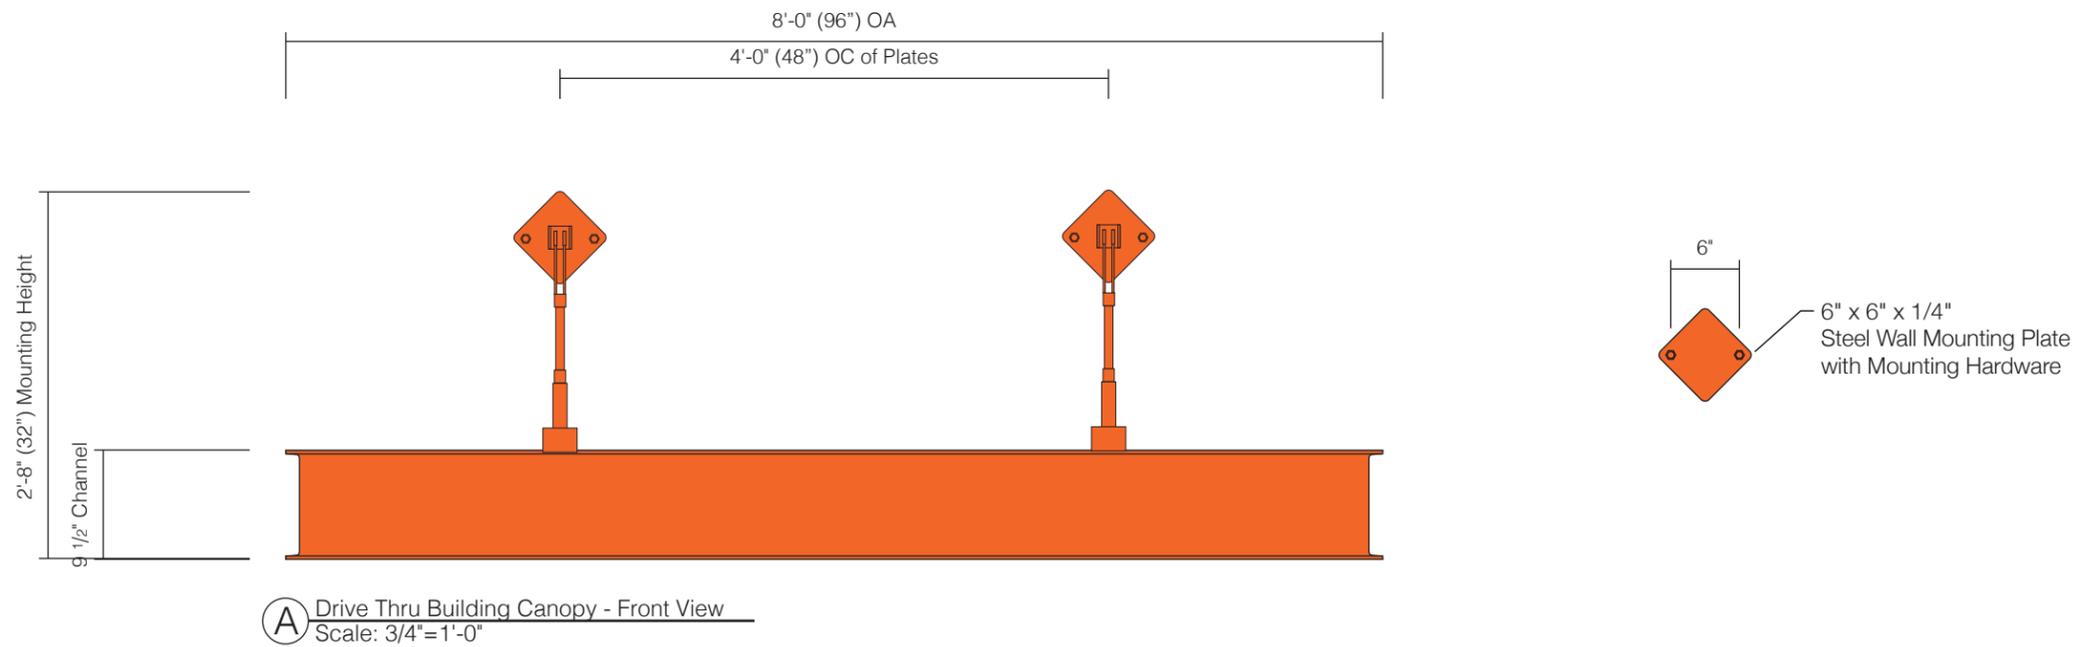

Specifications

Qty = 1

Architectural Metal Canopy w/ Down Lighting

- See all details on this page and detail D on page 1A.2
- All materials and exposed fastener heads to be painted PMS 165C
- Downlight fixtures to be white with white illumination
- Connection point at canopy for Tie Rod Yokes to also be pick up points
- Canopy to be pre-assembled, pre-wired and UL stamped in shop
- Lag bolted into wood blocking provided by GC
- Secure diverter pan to wall with tek screws and silicone caulking sealant
- *Shims may be required behind mounting plates, at time of installation to level out with existing trim board

Provided By Others - All below to be provided by others

- (Qty: 2) 2" thick x 12" high wood blocking directly behind signage
- Flashing and Waterproofing required by others
- 120V/277V Primary electrical
- Primary electrical connection by others

Colors & Materials

Paint

To Match PMS 165C; Gloss Finish

Special Order Parts



Qty 2
4" Halo Ultra Thin Downlight
3000K
Wet-Rated, UL Listed
SKU #HLBSL4069FS351EMWR

Note:
This is an original unpublished drawing created by Poyant Signs, Inc. It is submitted for your personal use in connection with a project being planned for you by Poyant Signs, Inc. It is not to be shown to anyone outside your organization, nor is it to be reproduced, copied or exhibited in any fashion until transferred.

Revisions:



This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and / or other applicable local codes. This includes proper grounding and bonding of the sign.




All Signage Shown is Covered by Poyant's Exclusive DD Franchisee 3 Year Brand Identity Warranty Program

Approved By:

Date:

Architectural Metal Canopy w/
Down Lighting
Option A

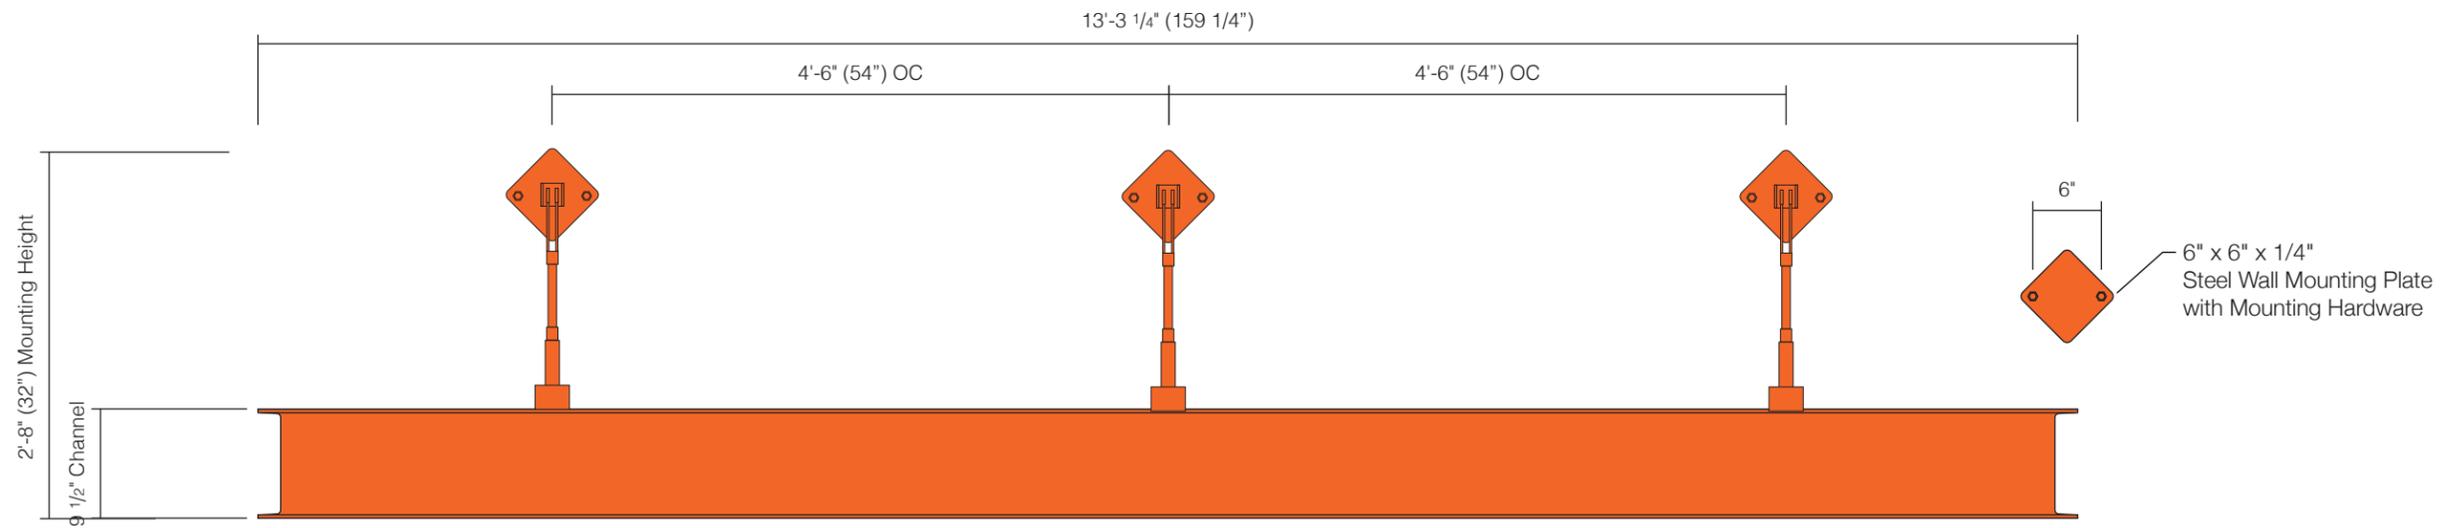

A Drive Thru Building Canopy - Front View
Scale: 3/4" = 1'-0"

Project: 20599
Dunkin'

Sales: Bill Gavigan Jr.
Date: 1.19.22
Designer: RMA

Note:
This is an original unpublished drawing created by Poyant Signs, Inc. It is submitted for your personal use in connection with a project being planned for you by Poyant Signs, Inc. It is not to be shown to anyone outside your organization, nor is it to be reproduced, copied or exhibited in any fashion until transferred.

Revisions:



This sign is intended to be installed in accordance with the requirements of Article 600 of the National Electrical Code and / or other applicable local codes. This includes proper grounding and bonding of the sign.




All Signage Shown is Covered by Poyant's Exclusive DD Franchisee 3 Year Brand Identity Warranty Program

Approved By: _____


Date: _____

Architectural Metal Canopy

Option A

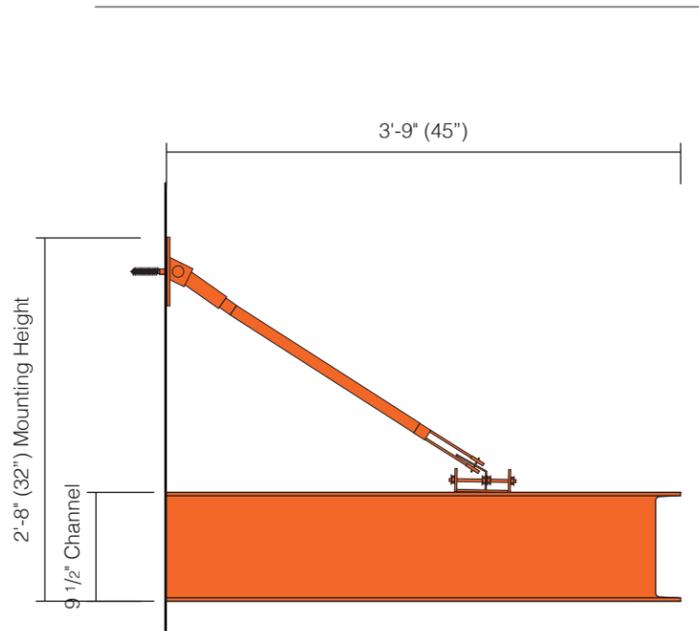

B Drive Thru Window Building Canopy - Side View
Scale: 3/4" = 1'-0"

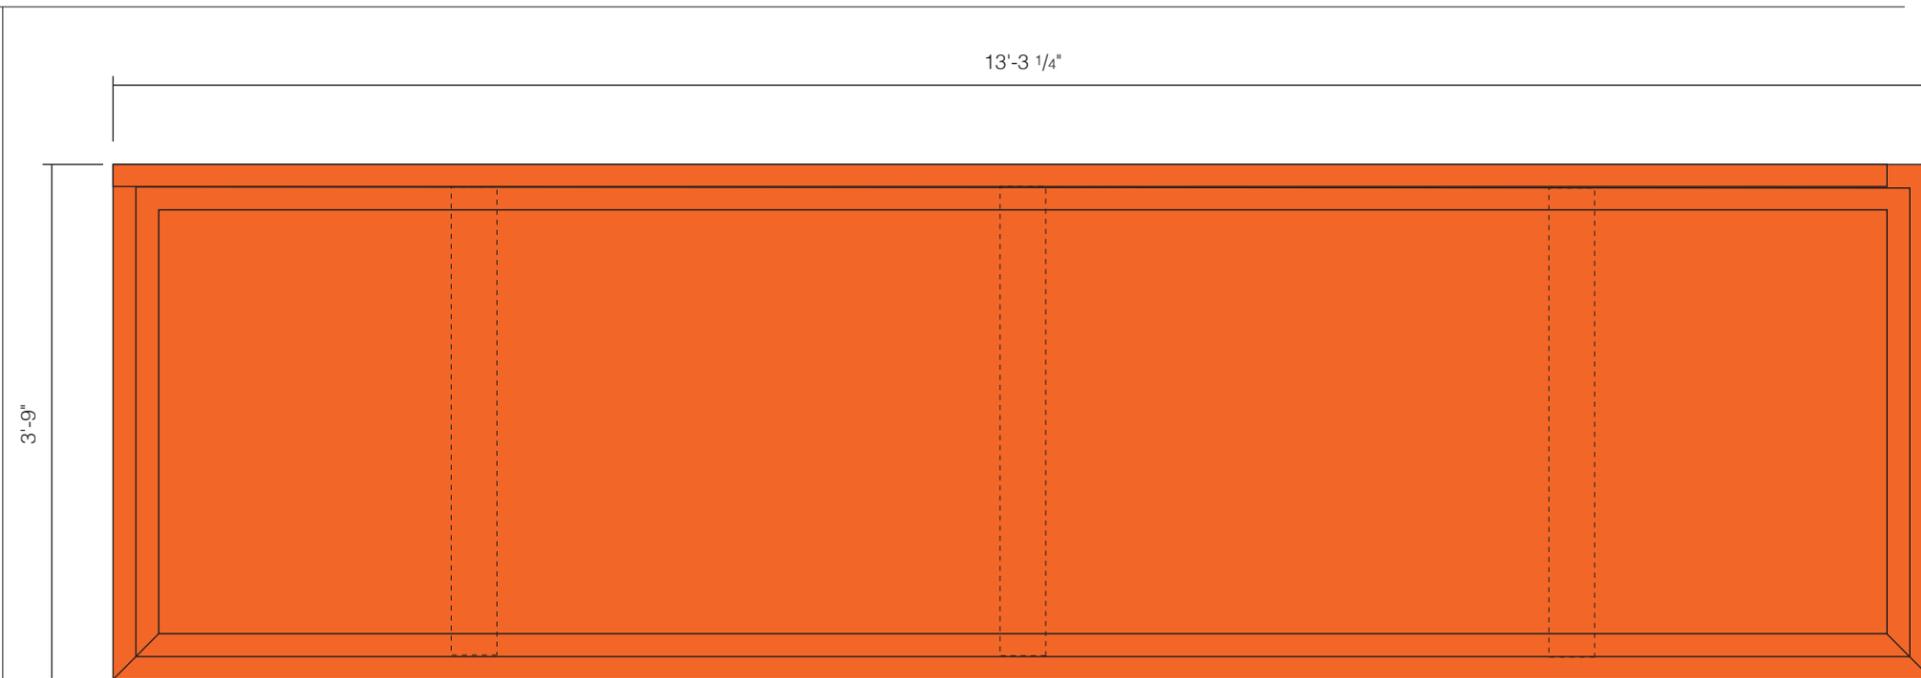

C Drive Thru Window Canopy - Bottom View
Scale: 3/4" = 1'-0"

Specifications

Qty = 1

Architectural Metal Canopy

- See all details on this page and detail D on page 1A.2
- All materials and exposed fastener heads to be painted PMS 165C
- Connection point at canopy for Tie Rod Yokes to also be pick up points
- Canopy to be pre-assembled
- Lag bolted into wood blocking provided by GC
- Secure diverter pan to wall with tek screws and silicone caulking sealant
- *Shims may be required behind mounting plates, at time of installation to level out with existing trim board

- Provided By Others** - All below to be provided by others
- (Qty: 2) 2" thick x 12" high wood blocking directly behind signage
 - Flashing and Waterproofing required by others

Colors & Materials

Paint

To Match PMS 165C; Gloss Finish